

Taber® Abrading Wheels

TABER
INDUSTRIES
ISO 9001 REGISTERED

Wear and Abrasion Testing

Taber® abrading wheels produce characteristic rub wear action.


Two abrasive wheels create the circular wear path recognized as a Taber Rotary Abraser test. As specimens are subjected to the rub-wear action of the wheels, the abrasion marks form a pattern of crossed arcs resulting in a circular ring. This process abrades the sample over all angles of grain or weave, and covers approximately 30 square centimeters.

Analytical grade abrasive materials ensure test repeatability.

The composition of Taber abrading wheels has been carefully chosen and a rigorous quality program maintains the uniformity of the wheels. Used in pairs, each wheel is labeled left or right to assure the mounting position will be duplicated should the wheels be removed and later reinstalled. The wheels should be refaced according to recommended practice, and can be used to their minimum usable diameter of 45 mm (1¾ inch) O.D.

Offered in a range of abrasiveness for a range of material evaluation.

The choice of abrading wheels should be based upon the wear the specimen material will be subjected to in actual use. Calibrase® wheels are a resilient type, typically used to test rigid specimens. Calibrade® wheels are vitrified, and are often used to evaluate flexible specimens. Other wheels are available for specific or unique applications, and custom formulations can be developed upon request.

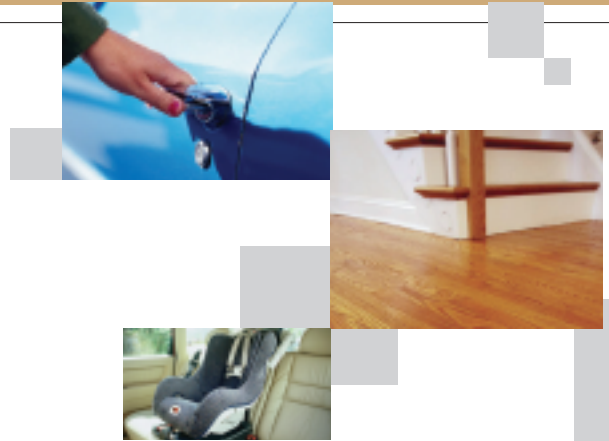

Taber® Abrading Wheels

Wear and Abrasion Testing

Calibrase® Wheels - now with 'Easy Glide' wheel hub

CS-10F	Brown	Has milder abrading action than the CS-10 wheel. Used primarily with transparent materials to evaluate hazing.	Do not exceed 500g load
CS-10	Green	Mild – medium abrading action, like that of normal handling, cleaning or polishing. Popular wheel for coatings, plastics, textiles, leather, and paper products.	
CS-10W	White	Same as CS-10, but white. No color transfer from wheel to specimen.	
CS-17	Dark Green	Produces a harsher abrasion than the CS-10 wheel. Useful for testing ceramics, plastics, and enamels.	

Reface with S-11 Refacing Disc or ST-11 Stone

Use before expiration date

Store in original container

Recommended storage conditions: temperature 23°C ±2°C and relative humidity 50% ±5%



Calibrade® Wheels

H-10	Grey	Designed for testing steel and other ferrous alloys.	
H-18	Grey	Medium abrasive properties. Recommended for leather, rubber, certain woven textile fabrics, coated fabrics, flexible plastic sheet, and other soft, resilient materials.	
H-22	Green-Grey	Produces a coarse abrasion. Test materials such as rubber, linoleum, leather, deep pile fabrics, and concrete.	
H-38	Tan	Very fine-grained wheel. Principal use is for testing woven fabrics or delicate textiles.	Do not exceed 500g load, reface with multipoint tool

Reface with Taber Wheel Refacer

NOTE: The wear life of Calibrase or Calibrade wheels will vary based on the load; surface texture and frictional characteristics of the material tested; and frequency of refacing. The abrasive coefficient can be altered by oil or contaminant's, handle only the sides of the wheels.



Specialty Wheels

CS-5	White	Densely compacted wool felt wheel. Principal use is in testing textile fabrics to evaluate one fibrous material rubbing against another.	Do not exceed 500g load
S-32 (CS-0)	Black	Plain rubber wheel containing no abrasive. Used for very mild abrasive action, wet tests, and to mount S-33 or S-42 adhesive sandpaper strips.	
S-35		Tungsten Carbide wheel consisting of sharp 1 mm pitch x 45° spiral pitch angle, helical teeth cut in its periphery. Produces a very severe cutting and tearing action. Used only on resilient materials.	Clean with solvent and stiff brush
S-39		A leather strip mounted to the exterior of a brass hub. Used in conjunction with Grit Feeder.	Minimum usable diameter is 46 mm (1 ¹³ / ₁₆ inch).
S-33		Sandpaper Strip used with S-32 (CS-0) wheel. 12.7mm x 165mm, 360 FEPA, closed coat.	
S-42		Sandpaper Strip used with S-32 (CS-0) wheel. 12.7mm x 165mm, 180 ANSI-CAMI, open coat.	



Setting the Industry Standard

455 Bryant Street
North Tonawanda, New York 14120 USA

For more information:

Call 1.800.333.5300 (U.S.) or 716.694.4000 (outside U.S.)

Fax 716.694.1450

Email us at sales@taberindustries.com

Visit us at www.taberindustries.com